

61721305	DATA SHEET
Valid from: 18.09.2020	SCHIRMKLEMME EMC-GUARD MOUNT

The shield clamp for direct assembly can be screwed directly, for example, onto the mounting plate. Simply push the cable shield into the shield clamp in order to achieve secure contact. The strain relief flap offers the possibility of reducing strain on the cable sheath by using a cable tie.



Material:

spring steel,
Galvanic plated

Technical features:

Mounting

35mm DIN rail

Clamping range

3 - 18mm

Features:


Strain relief

with cable tie acc. to DIN 62444

Attenuation of conductance

up to 35dB by 30 MHz

Technical drawing

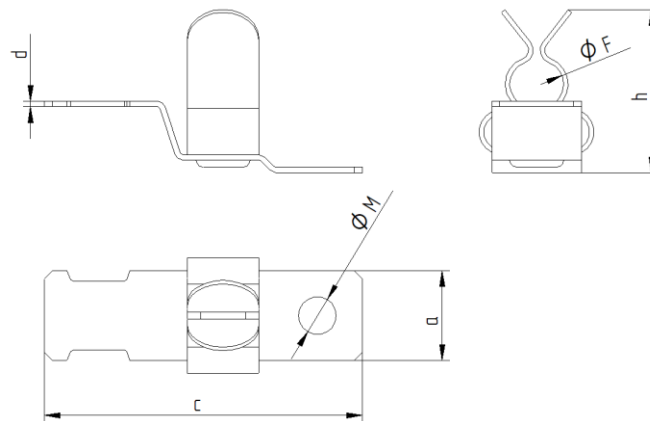

Maßtabelle:

Artikel Nr.	Breite a mm	Länge c mm	Dicke d mm	Höhe h mm	Klemmbereich Ø F mm	Montagebohrung Ø M mm
6172 1305	10	35,4	0,6	18,1	3 - 6	4,2
6172 1306	10	35,4	0,6	20,8	6 - 8	4,2
6172 1307	10	35,4	0,6	22,5	8 - 11	4,2
6172 1308	10	35,4	0,6	25,6	3 - 12	4,2
6172 1309	10	35,4	0,6	34,4	7 - 18	4,2