


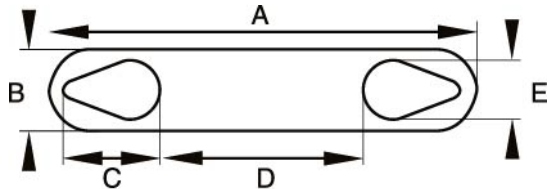
	<b>DATA SHEET</b>	
Valid from: 19.06.2019	<b>FLEXIMARK® Flexiprint FCC</b>	

For single core marking and marking of fiber optic wires and cables.  
 For marking before assembly.  
 Quick mounting with simple locking arrangement for fast, secure application.  
 Free choice of letters, figures and symbols on one or two lines.  
 Max. 7 characters per line.  
 Unique marking system.



**Technical data:**


Material:	Polyester, halogen free
Temperature range:	-40°C up to +125°C
Cable area:	0,25-16 mm <sup>2</sup>
Colours:	white, yellow, blue, green, red
Recommended maximum amount of characters:	7 characters (L-version 15 characters)
Recommended storage:	Cool and dry in original packaging



Flexiprint type:	Cable area mm <sup>2</sup>	Measurement A (mm)	Measurement B (mm)	Measurement C (mm)	Measurement D (mm)	Measurement E (mm)
F0	0,25-0,75	22,9	5,2	3,9	13,1	2,4
F1	0,75-1,5	23,0	5,2	4,9	11,2	3,5
F1L	0,75-1,5	34,0	5,2	5,0	22,0	3,5
F1B	1,5-2,5	25,0	5,7	5,9	11,2	4,2
F1BL	1,5-2,5	36,0	5,7	6,0	22,0	4,2
F2	2,5-6	26,0	7,0	6,5	11,0	5,5
F3	6-16	41,0	11,0	10,5	17,0	8,4

**Advantages:**

Custom marking.  
 Easy marking before assembly.  
 Unique marking system with fast mounting on site.  
 Material tested by a third independent expert.

	<b>DATA SHEET</b>	
Valid from: 19.06.2019	<b>FLEXIMARK® Flexiprint FCC</b>	

**Product data:**

E-nr.	LAPP Part no.	Article designation	Cable area (mm <sup>2</sup> )	Colour	Marker dimensions (mm)	Quantity
2940571	83251100	F0 YE 0.25-0.75 FCC	0,25-0,75	Yellow	22,9x5,2	1
2940573	83251110	F1 YE 0.75-1.5 FCC	0,75-1,5	Yellow	23x5,2	1
2940436	83251160	F1L YE 0.75-1.5 FCC	0,75-1,5	Yellow	34x5,2	1
2940575	83251120	F1B YE 1.5-2.5 FCC	1,5-2,5	Yellow	25x5,7	1
2940447	83251170	F1BL YE 1.5-2.5 FCC	1,5-2,5	Yellow	36x5,7	1

**Resistance of FLEXIMARK® Flexiprint LF:**

RICE test SP-2171

	Resistance test		Chemical resistance test with abrasion						
	UV	Ageing	Diesel	Acid (H <sub>2</sub> SO <sub>4</sub> ) 25%	Alkali (Detergent solution, 10%)	Distilled water	Salt water (5% NaCl)	Transformer oil (Nytro 10X)	Ethanol
<i>FLEXIMARK®</i>									
<i>Flexiprint LF</i>	Tested & Recommended	Tested & Recommended	Tested & not recommended	Tested & not recommended	Tested & recommended	Tested & recommended	Tested & recommended	Tested & recommended	Tested & not recommended

**Note:**

Pictures are not to scale and do not represent detailed images of each product.

Creator: Fleximark/LR	Document: DB83251100EN Version: 00	Page 2 of 2
-----------------------	---------------------------------------	-------------