44424043	DATA SHEET

Valid from: 02.06.2023 EPIC® POWER K 4/2



## Description

- Combination insert Power and Control
- High power in one connector insert
- Best in combination with ÖLFLEX® SERVO



## **General Characteristics**

Series K 4

Version Male (Article 44424043)/Female(Article 44424044)

Number of Contacts 4 + 2 + PE

Termination Methods Power Screw termination: 1.5 - 16.0 mm<sup>2</sup>
Termination Methods Control Screw termination: 0,5 - 2,5 mm<sup>2</sup>

Temperature Range -40°C to +125°C

### **Mechanical Characteristics**

Cycle of mechanical operation 500

# **Electrical Characteristics**

 Rated Voltage
 830 V Power

 400 V Control
 600 V Power

 300 V Control
 600 V Power

Rated Voltage CSA

300 V Control

8 kV Power

Rated Current

Rated Current

Contact Resistance

6 kV Control
80 A Power
16 A Control
<5 mOhm

Degree of Soiling 3

## **Materials and Surfaces**

Insert material PC
Flammability Class according to UL 94 V0
Contacts CuZn
Contact plating Ag (Silver)

## **Approvals**

UL-Approval E-File E75770

Creator: STKU3/PDP	Document: DB44424043EN	Daga 1 of 2
Released: IVSE1/PDP	Version: 05	Page 1 of 3

44424043	DATA SHEET	<b>MIADD</b>
Valid from: 02.06.2023	EPIC® POWER K 4/2	<b>WLAPP</b>


# **Standards**

Safety Standards

IEC 61984, UL1977, CSA 22.2 182.3



# **Technical Drawing**

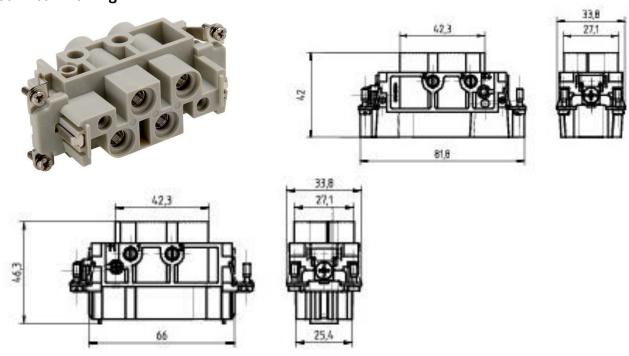


Creator: STKU3/PDP	Document: DB44424043EN	Dage 2 of 2
Released: IVSE1/PDP	Version: 05	Page 2 of 3

# Valid from: DATA SHEET



# **Derating curve**

02.06.2023

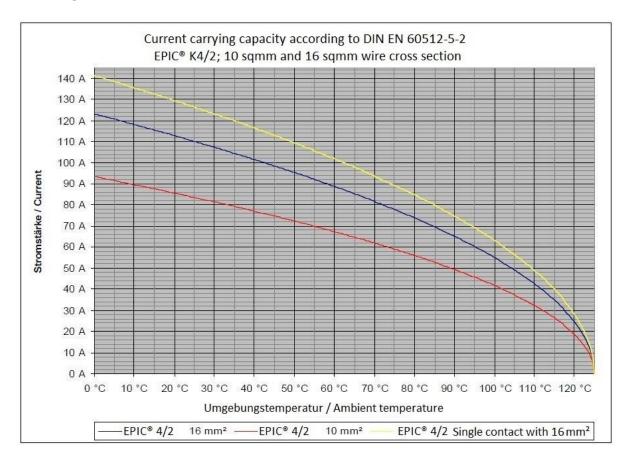

**EPIC® POWER K 4/2** 



Industrial machinery and plant engineering



Temperature-resistant



Wind Energy

## Info

Combination Insert Power and Control

### Application range

Mechanical engineering Renewable energy Control engineering

## Remark

PE connection with a 16mm<sup>2</sup> wires only with the recommended ring lug 44424029.

The inserts must be used with the appropriate housings.

To connect stranded conductors, use an end sleeve.

Photographs are not to scale and do not represent detailed images of the respective products.

 <u> </u>		
Creator: STKU3/PDP	Document: DB44424043EN	Dogo 2 of 2
Released: IVSE1/PDP	Version: 05	Page 3 of 3