


22260462	DATA SHEET	
Valid from: 13.12.2018	AB-C5-(L*)PUR-M12FS-SH	

Product description

Sensor/actuator cable, 5-pos., PUR black, straight socket M12 on free conductor end, shielded.



Product variations

Article number	Article description	Length (L*) [m]
22260462	AB-C5-2,0PUR-M12FS-SH	2
22262136	AB-C5-3,0PUR-M12FS-SH	3
22260463	AB-C5-5,0PUR-M12FS-SH	5
22260464	AB-C5-10,0PUR-M12FS-SH	10
22260468	AB-C5-11,0PUR-M12FS-SH	11
22261057	AB-C5-20,0PUR-M12FS-SH	20

This datasheet is also valid for other length configurations. Other lengths upon request.

M12 connector


General properties

Coding	A
Protection degree	IP65/IP67
Number of contacts	5
Ambient temperature	-25 °C to +90 °C (-13 °F to +194 °F)
Rated voltage	60 V
Rated current	4 A
Insulation resistance	≥ 100 MΩ
Overvoltage category	II
Pollution degree	3
Tightening torque	0.4 Nm
Mating cycles	100

Materials

Contact carrier	TPU GF
Contact carrier, Inflammability class acc. to UL 94	HB
Material, contacts	CuSn
Contact surface	Ni/Au
Material, grip body	TPU
Material, knurl	zinc die-cast, nickel-plated
Material, sealing	NBR

Creator: FELI1/FEJA1/PDP Released: IVSE1/PDP	Document: DB22260462EN Version: 05	Page 1 of 3
---	---------------------------------------	-------------

22260462	DATA SHEET	
Valid from: 13.12.2018	AB-C5-(L*)PUR-M12FS-SH	


Cable

Signal line, construction	42 x 0.10 mm
Signal line, AWG	22
Conductor, material	stranded of bare copper wire
Conductor, cross-section	0.34 mm ²
Number of cores	5
Core identification code	brown (1), white (2), blue (3), black (4), grey (5)
Outer diameter, core insulation	ca. 1.27 mm
Core insulation, material	PP
Screening	braid of copper wire
Coverage	80 %
Outer sheath	PUR
Outer sheath, colour	black similar to RAL 9005
Outer diameter, cable	ca. 5.25 mm
Ambient temperature, fixed installation	-40 °C to +80 °C (-40 °F to +176 °F)
Ambient temperature, flexing	-25 °C to +80 °C (-13 °F to +176 °F)
Minimum bending radius, fixed installation	26 mm
Minimum bending radius, flexing	52 mm
Travel length	10 m
Travel speed	3 m/s
Acceleration	10 m/s ²
Number of bending cycles	10.000.000
Flame retardance	flame retardant acc. to UL 758/ 1581 FT2 and DIN EN 60332-2-2 (20s)
Halogen free	halogen free acc. to DIN VDE 0472 Part 815
Oil resistance	acc. to DIN EN 60811-2-1
Other resistances	resistant to hydrolysis and microbes limited UV resistance acc. to DIN EN ISO 4892-2-A

Standards/Approvals


Product standard, M12 connector	IEC 61076-2-101
UL-listed, E-File	E 249137

Creator: FELI1/FEJA1/PDP Released: IVSE1/PDP	Document: DB22260462EN Version: 05	Page 2 of 3
---	---------------------------------------	-------------


22260462	DATA SHEET	
Valid from: 13.12.2018	AB-C5-(L*)PUR-M12FS-SH	

Drawings


Dimensioned drawing, M12 connector

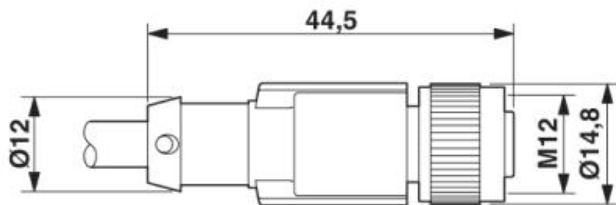

Wiring diagram

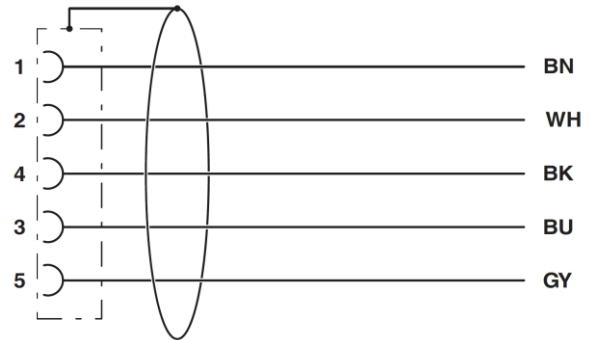

Pin assignment

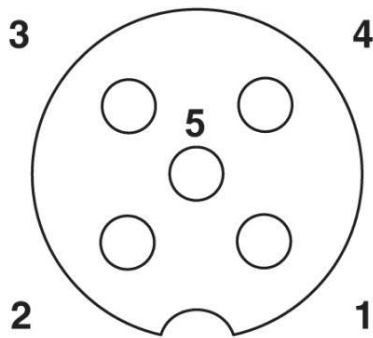

Cable



Core identification code: brown (1), white (2), blue (3), black (4), grey (5)

Application range

Automation, industrial machinery and plant engineering

Note

Photographs are not true to scale and do not represent detailed images of the respective products.

Creator: FELI1/FEJA1/PDP Released: IVSE1/PDP	Document: DB22260462EN Version: 05	Page 3 of 3
---	---------------------------------------	-------------