


|                           |  |
|---------------------------|--|
| 29421199                  | <b>DATA SHEET</b>                            |
| Valid from:<br>24.05.2018 | <b>GOF Adapter Duplex ST-SC Multimode BE</b> |

### Description

- GOF Optical fiber adapter ST-Duplex on SC-Duplex
- Singlemode- and multimode-type



### General characteristics

|                   |   |
|-------------------|---|
| Type of coupling  | ST-Duplex (ST-D)<br>SC-Duplex (SC-D)            |
| Flange            | Yes   |
| Attenuation       | < 0.2 dB  |
| Temperature range | -40 °C to +85 °C (-40 °F to 185 °F) (Operation) |


### Variation

| Article  | Description                            | For fiber-type  |
|----------|--|-----------------|
| 29421199 | GOF Adapter Duplex ST-SC Multimode BE  | Multimode (MM)  |
| 29421999 | GOF Adapter Duplex ST-SC Singlemode BL | Singlemode (SM) |

### Mechanical properties

|                               |          |
|-------------------------------|----------|
| Flame retardant acc. to UL 94 | V-0      |
| Housing, material             | C3604    |
| Guide sleeve, material        | Zirconia |
| Mating cycles (min.)          | 1000     |

### Technical drawing

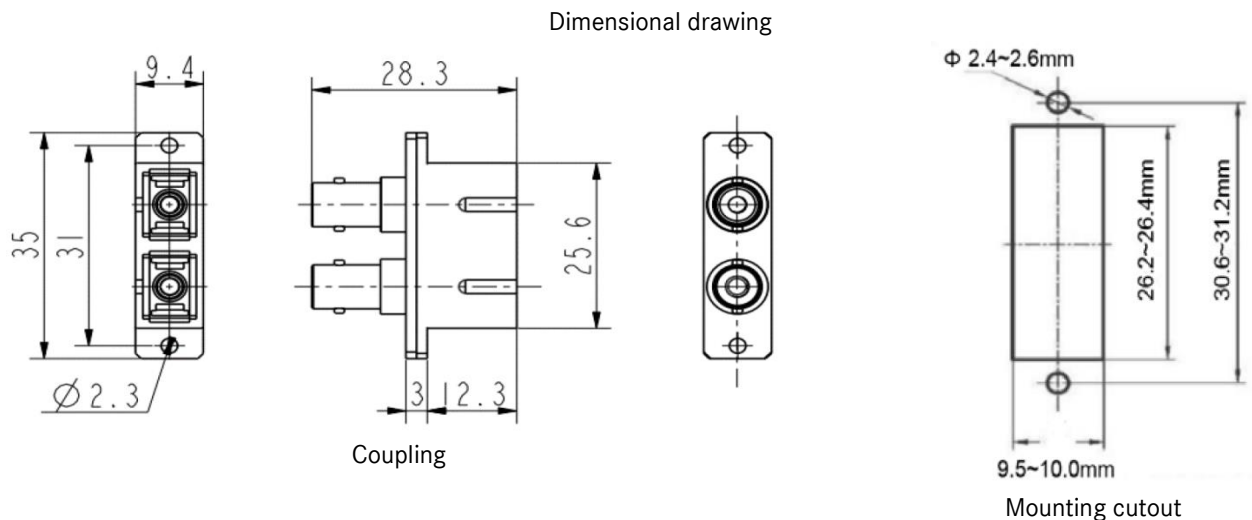

|                           |  |
|---------------------------|--|
| 29421199                  | <b>DATA SHEET</b>                            |
| Valid from:<br>24.05.2018 | <b>GOF Adapter Duplex ST-SC Multimode BE</b> |

**Standard**

Fibre optic connector interfaces – Part 4: Type SC

IEC 61754-4

Fibre optic connector interfaces – Part 2: Type BFOC/2,5

IEC 61754-2

**Application range**

Office, Data centers, Industry

**Note**

Photographs are not true to scale and do not represent detailed images of the respective products.