

<b>DATA SHEET</b>	CE9913
LWL-Splice prevention	Valid from: 26.03.2018

### Description


- Optical fiber crimp splice protection
- Corrosion-resistant, no increase of damping



### General characteristics

Temperature range	-5°C to +45°C (processing) -20°C to +70°C (operating temperature)
Optical fibre diameter (max)	Ø270µm
Material	durable plastic compound (PIB) aluminium sheet

### Technical drawing

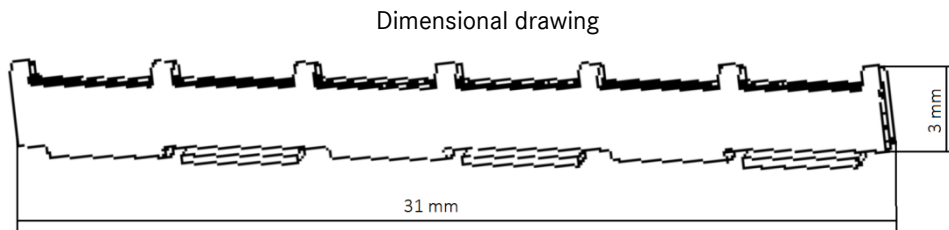

### Application range

Office, industrial machinery and plant engineering

### Note

Photographs are not true to scale and do not represent detailed images of the respective products.