### 10440100

## **DATA SHEET**

Valid from: 18.09.2020 EPIC® H-A10 SS / H-A10 BS DR



### Description

- H-A inserts with screw termination up to 2.5 mm<sup>2</sup> wire cross section.
- Slim connector insert for standard application.
- Easy to service screw connection.
- Universal for current and voltage transmission.



### **General Characteristics**

Series H-A 10

Version Male/Female(Article 10441100)

Wire Protection Yes **Number of Contacts** 10+PE

Screw termination: 0.5 - 2.5 mm<sup>2</sup> (2.5 mm<sup>2</sup> with **Termination Methods** conductor end sleeves depending on the crimping

profile)

Protection (DIN EN 60529) IP65, latched to the housing Protection (NEMA 250, UL50E) 4, 12, latched to the housing

Temperature Range -40°C to +100°C, short-term up to +125°C

**Mechanical Characteristics** 

Cycle of mechanical operation 100

**Electrical Characteristics** 

Rated Voltage, IEC 400 V Rated Voltage, UL 600 V 600 V Rated Voltage, CSA 4 kV Rated Impulse Voltage Rated Current, IEC 16 A Rated Current, UL 14 A Rated Current, CSA 16 A

1,5 - 4 mOhm Contact Resistance

Degree of Soiling 3

**Materials and Surfaces** 

Contacts Copper alloy, hard silver-plated

Insulating Body PC Flammability Class according to UL 94 V0

**Approvals** 

UL-Approval, E-File-Number E75770 VDE-Approval, VDE-REG.-Nr. B437

Standard

Safety Standard IEC 61984, UL 1977, CSA-C22.2 182.3

Creator: MANA2/PDP	Document: DB10440100EN	Page 1 of 3
Released: IVSE1/PDP	Version: 03	

10440100	
Valid from:	

18.09.2020


# **DATA SHEET**




EPIC<sup>®</sup> H-A10 SS / H-A10 BS DR

### **Technical Drawings**





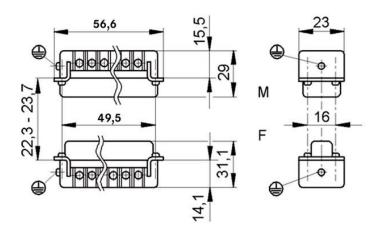

Creator: MANA2/PDP	Document: DB10440100EN	Page 2 of 3
Released: IVSE1/PDP	Version: 03	

## 10440100 DATA SHEET

Valid from: 18.09.2020

## $\mathsf{EPIC}^{\scriptscriptstyle{(\! R)}}\,\mathsf{H}\text{-A10 SS}\ /\ \mathsf{H}\text{-A10 BS DR}$











Industrial machinery and plant engineering



Assembly time



Space requirement

#### Info

Slim standard insert, easy to connect by screw Universal for current and voltage transmission

### **Application range**

Machine and equipment manufacturings Control engineering

#### Remark

Photographs are not to scale and do not represent detailed images of the respective products.